



TEKNISET TIEDOT
LEADER PF1

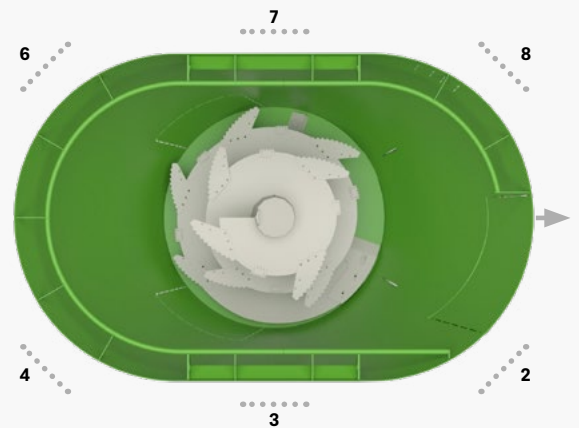

It brings to the attention of all potential customers, all recipients, and to the maximum extent possible, external interlocutors, that Faresin Industries S.p.A. adopts a general Disclaimer regarding the description of the technical and functional characteristics of its machineries, as well as the manner of their use, also with regard to their safety. The Disclaimer must be understood as having a general scope, and therefore Faresin Industries s.p.a. invites to know it, also by accessing the website: www.faresindustries.com



FARESIN.COM



MOOTTORI STAGE V		1.11	1.14A	1.14B	1.17A	1.17B	1.20
Malli		FPT N45	FPT N45	FPT N45	FPT N45	FPT N67	FPT N67
Teho	kW/hp	125/170	125/170	125/170	125/170	151/205	151/205
Päästökäsittely		DOC + SCR	DOC + SCR	DOC + SCR	DOC + SCR	DOC + SCROF	DOC + SCROF
Tilavuus	m³	11	14	14	17	17	20

Mitat ECOMIX		1.11	1.14A	1.14B	1.17A	1.17B	1.20
[A] kokonaispituus	mm	7650	8090	7650	8090	8000	8440
[B] korkeus	mm	2875	3220	2980	3280	2980	3270
[C] leveys	mm	2440	2440	2550	2550	2920	2920
[D] jyrsimen leveys	mm	2040	2040	2040	2040	2040	2040
[E] jyrsinkorkeus	mm	4950	5350	4940	5350	4940	5350
[F] purkukorkeus	mm	610	600	600	600	600	600
[G] raideleveys	mm	2340	2340	2340	2340	2340	2340
[H] akseliväli	mm	3560	3560	3560	3560	3910	3910
[I] peräylitys	mm	1030	1030	1030	1030	1030	1030
[L] keulaylitys	mm	3060	3500	3060	3500	3060	3500
[M] rungon korkeus	mm	420	410	410	410	410	410

PAINO

Tyhjäpaino	kg	11000	12700	12000	12600	13000	13600
Maksimi paino	kg	3850	4900	4900	5950	5950	7000

RENKAAT

Vakiona		315/60 R22.5	435/50 R19.5	435/50 R19.5	435/50 R19.5	435/50 R19.5	435/65 R22.5
---------	--	--------------	--------------	--------------	--------------	--------------	--------------

Mitat ECOMODE		1.11	1.14A	1.14B	1.17A	1.17B	1.20
[A] kokonaispituus	mm	7650	8090	7650	8090	8000	8440
[B] korkeus	mm	2935	3290	3050	3350	3050	3340
[C] leveys	mm	2440	2440	2550	2550	2920	2920
[D] jyrsimen leveys	mm	2040	2040	2040	2040	2040	2040
[E] jyrsinkorkeus	mm	5010	5420	5010	5420	5010	5420
[F] purkukorkeus	mm	670	670	670	670	670	670
[G] raideleveys	mm	2340	2340	2340	2340	2340	2340
[H] akseliväli	mm	3560	3560	3560	3560	3910	3910
[I] peräylitys	mm	1030	1030	1030	1030	1030	1030
[L] keulaylitys	mm	3060	3500	3060	3500	3060	3500
[M] rungon korkeus	mm	480	480	480	480	480	480

PAINO

Tyhjäpaino	kg	11900	12900	12800	13000	13500	14000
Maksimi paino	kg	3850	4900	4900	5950	5950	7000

RENKAAT

Vakiona		385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5
---------	--	--------------	--------------	--------------	--------------	--------------	--------------

Konfiguraatio		ECOMIX	ECOMODE
Veitsien määrä		10 - 14	10 - 14
Grammer ilmaistu		●	●
Joystick		Vakiona	Vakiona
Hytti		PF Hytti	PF Hytti
Ilmanvaihto		Vakiona	Vakiona
6 led työvalo		●	●
Polttoainetankki l		230	230
Vaakajärjestelmä neljällä anturilla rungon ja säiliön välissä		●	●
Maksiminopeus	km/h	25 - 30	25 - 40
Etuakseli		Veto, ohjaus, jousitus	Veto, ohjaus, jousitus
Taka-akseli		Ohjaus	Veto, ohjaus, jousitus
Abs järjestelmä		-	Automaattinen
Asr järjestelmä		-	Manuaalinen
Ruuvien määrä		2	2
Ruuvien pyörimisnopeus	rpm	5, 10, 15, 20, 25, 30, 40, 50	5, 10, 15, 20, 25, 30, 40, 50
Jyrsinrummun halkaisija	mm	600	700
Hydrauliset vastaterät		2	2
Repijä jyrsimen jälkeen		○	○
Automaattirasvari		○	○