



TEKNISET TIEDOT

LEADER PF 2 PLUS

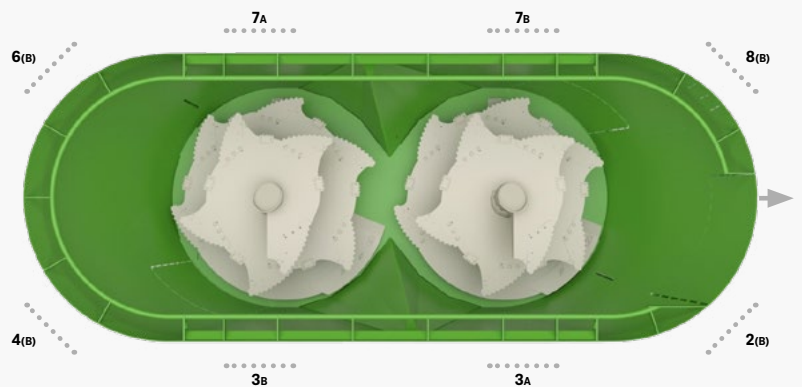

It brings to the attention of all potential customers, all recipients, and to the maximum extent possible, external interlocutors, that Faresin Industries S.p.A. adopts a general Disclaimer regarding the description of the technical and functional characteristics of its machineries, as well as the manner of their use, also with regard to their safety. The Disclaimer must be understood as having a general scope, and therefore Faresin Industries s.p.a. invites to know it, also by accessing the website: www.faresindustries.com

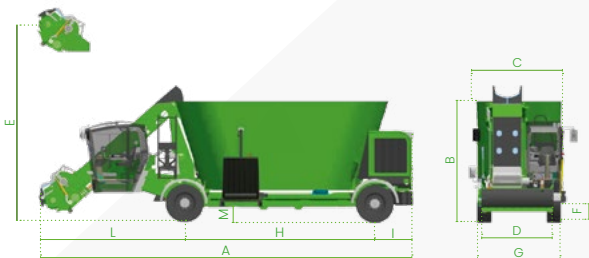

FARESIN.COM



MOOTTORI STAGE V		2.18	2.20	2.22	2.22B	2.24	2.26	2.26B	2.28	2.30	2.33
Malli		FPT N45	FPT N67	FPT N67	FPT N67	FPT N67	FPT N67	FPT N67	FPT N67	FPT N67	FPT N67
Teho	kW/hp	125/170	151/205	151/205	151/205	151/205	151/205	151/205	191/260	191/260	191/260
Päästökäsittely		DOC + SCR	DOC + SCROF	DOC + SCROF	DOC + SCROF	DOC + SCROF	DOC + SCROF	DOC + SCROF	DOC + SCROF	DOC + SCROF	DOC + SCROF
Tilavuus	m ³	18	20	22	22	24	26	26	28	30	33

Mitat ECOMIX		2.18	2.20	2.22	2.22B	2.24	2.26	2.26B	2.28	2.30	2.33
[A] kokonaispituus	mm	9640	9550	10030	9650	10000	10300	10060	10320	10320	10250
[B] korkeus	mm	2700	2870	3030	2870	3190	3430	3310	3390	3500	3720
[C] leveys	mm	2490	2480	2470	2450	2470	2470	2450	2550	2800	2800
[D] jyrsimen leveys	mm	2040	2040	2040	2040	2040	2040	2040	2040	2040	2040
[E] jyrsinkorkeus	mm	4935	4920	5310	4920	5310	5600	5400	5600	5600	6560
[F] purkukorkeus	mm	730	730	730	730	730	770	770	770	770	770
[G] raideleveys	mm	2385	2385	2385	2385	2385	2400	2400	2400	2400	2400
[H] akseliväli	mm	5370	5370	5370	5370	5370	5370	5570	5570	5570	5570
[I] peräylitys	mm	1080	1080	1080	1080	1080	1080	1050	1050	1050	1050
[L] keulaylitys	mm	3140	3070	3580	3050	3500	3850	3475	3850	3850	3630
[M] rungon korkeus	mm	370	370	370	370	370	440	440	440	440	440

PAINO

Tyhjäpaino	kg	14500	15000	15600	16000	16000	17000	16900	18000	18500	18600
Maksimi paino	kg	6300	7000	7700	7700	8400	9100	9100	9800	10500	11550

RENKAAT

Vakiona		435/50 R19.5	435/50 R19.5	435/50 R19.5	435/50 R19.5	435/50 R19.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5
---------	--	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------

Mitat ECOMODE		2.18	2.20	2.22	2.22B	2.24	2.26	2.26B	2.28	2.30	2.33
[A] kokonaispituus	mm	9640	9550	10030	9650	10000	10300	10060	10320	10320	10250
[B] korkeus	mm	2770	2940	3100	2940	3260	3430	3310	3390	3500	3720
[C] leveys	mm	2490	2480	2470	2450	2470	2470	2450	2550	2800	2800
[D] jyrsimen leveys	mm	2040	2040	2040	2040	2040	2040	2040	2040	2040	2040
[E] jyrsinkorkeus	mm	5005	4990	5380	5380	5380	5600	5470	5600	5600	6560
[F] purkukorkeus	mm	770	770	770	770	770	770	770	770	770	770
[G] raideleveys	mm	2400	2400	2400	2400	2400	2400	2400	2400	2400	2400
[H] akseliväli	mm	5370	5370	5370	5370	5370	5370	5570	5570	5570	5570
[I] peräylitys	mm	1080	1080	1080	1080	1080	1080	1050	1050	1050	1050
[L] keulaylitys	mm	3140	3070	3580	3050	3500	3850	3475	3850	3850	3630
[M] rungon korkeus	mm	440	440	440	440	440	440	440	440	440	440

PAINO

Tyhjäpaino	kg	15100	15500	16100	16300	16500	17000	17400	18000	18500	18600
Maksimi paino	kg	6300	7000	7700	7700	8400	9100	9100	9800	10500	11550

RENKAAT

Vakiona		385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5	385/65 R22.5
---------	--	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------	--------------

Konfiguraatio		ECOMIX	ECOMODE
Veitsien määrä		7 - 11	7 - 11
Grammer ilmaistu		●	●
Joystick		Vakiona	Vakiona
Hytti		PF Hytti	PF Hytti
Ilmanvaihto		Vakiona	Vakiona
6 led työvalo		●	●
Polttoainetankki I		230	230
Vaakajärjestelmä neljällä anturilla rungon ja säiliön välissä		●	●
Maksiminopeus	km/h	25 - 30	25 - 40
Etuakseli		Veto, ohjaus, jousitus	Veto, ohjaus, jousitus
Taka-akseli		Veto, ohjaus	Veto, ohjaus, jousitus
Abs-järjestelmä		-	Automaattinen
Asr-järjestelmä		-	Manuaalinen
Ruuvien määrä		2	2
Ruuvien pyörimisnopeus	rpm	5, 10, 15, 20, 25, 30, 40, 50	5, 10, 15, 20, 25, 30, 40, 50
Jyrsinrummun halkaisija	mm	600	700
Hydrauliset vastaterät		2	2
Repijä jyrsimen jälkeen		○	○
Automaattirasvari		○	○